

# FIREMIKS



## PISTON PUMP TYPE FOR FIXED INSTALLATIONS

### Approval: FM Class 5130



Dosing system for firefighting - for fixed installations connected to a concentrate tank with gravity feed to dosing pump. Consists mainly of two volumetric parts; a Water motor and a Piston pump. Equipped with a Manual air relief valve. Flushing of dosing pump is done automatically when the concentrate inlet is closed with 3-way ball valve, (no 4 on Flow chart).

FM approved when used together with FM Approved concentrates and discharge devices.

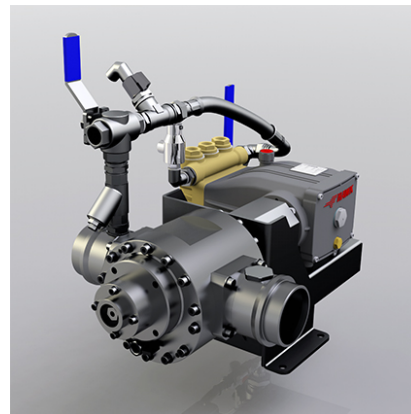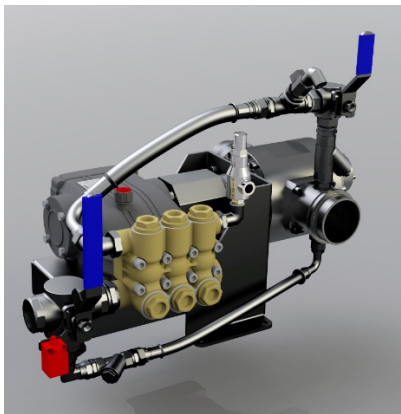

### TECHNICAL DATA

PRODUCTS:	Flow range lpm	Nominal water line
FIREMIKS 450-3-PP-F-ALU-FM	112 – 450	2" (50)
FIREMIKS 800-3-PP-F-ALU-FM	135 – 800	2,5" (65)
FIREMIKS 1200-3-PP-F-ALU-FM	260 – 1200	3" (80)
FIREMIKS 1800-3-PP-F-ALU-FM	240 – 1800	4" (100)
FIREMIKS 2400-3-PP-F-ALU-FM	311 – 2400	4" (100)
FIREMIKS 3200-3-PP-F-ALU-FM	500 – 3200	5" (125)
<p><i>Note! Maximum water flow rate is the approved maximum continuous flow rate entering the FIREMIKS. The unit has been tested for 40% overflow for 3 minutes (3200-unit for 25% overflow for 10 minutes) at start-up without any damage. During overflow/overspeed, the correct dosing might not be achieved.</i></p> <p><i>Minimum water flow rate varies depending on system pressure and viscosity properties of the concentrate. Minimum flow rate is here defined as the lowest flow rate where the dosing is correct, above 3,0%, at 4 bar inlet pressure.</i></p>		
<b>Nominal dosing rate:</b>	3 % (approved range 3,0-3,9 %)	
<b>Approved viscosity range:</b>	1 cps – 1800 cps at 60 rpm with Brookfield viscometer, spindle #4	
<b>Max inlet operating pressure:</b>	16 bar (232 psi)	
<b>Factory tested pressure:</b>	24 bar (348 psi)	
<b>Suction height:</b>	0 meters (0 ft) Gravity feed	
<p><i>The pump has suction capability, but it is not recommended to be relied upon for safe operation. Suction requires priming of the pump and will lower dosing performance.</i></p>		
<b>Operation temperature:</b>	1°C to 55 °C (34°F to 131°F)	
<b>Storage temperature, dry condition:</b>	-30°C to 55°C (-22° to 131°F)	

Document: Data Sheet FIREMIKS FM Overall

Approved by: PA/MA

Version: 01


Date: 2018-01-09

<b>MATERIALS</b>	
<b>Water motor:</b>	Alu AA 6082/7075, Hard-anodized and PTFE-coated, AISI 316 (fasteners), PET (vanes), NBR (O-rings).
<b>Dosing pump:</b>	Aluminium, brass, ceramics, NBR, AISI 316 (fasteners)
<b>Fittings:</b>	High grade stainless steel
<b>Valves and hoses:</b>	High grade stainless steel + PTFE
<b>OPTIONAL</b>	
<b>Dosing return valve with pressure relief valve</b>	Valve for returning the concentrate to the tank for easy and quick checking of admixture rate, without consuming concentrate and generating water/foam solution. Pressure relief valve included and set to open at 20 bar.
<b>Reversed Flow direction (right to left)</b>	Standard flow direction is from left to right seen from pump side
<b>Adapters for water motor connections</b>	Flanges of different kinds (ANSI, DIN), Storz couplings, etc
<b>Y-strainer main water flow</b>	If the firefighting water contains foreign particles a strainer in the main water line before the FIREMIKS is a necessity


While the above numbers are correct to our best knowledge, for best practice we strongly recommend contacting us with your dosing case, stating the required flows and pressures, the data sheet of the concentrates to be used and any other useful information, so we can provide you with our most suitable dosing solution.



## FLOW CHART

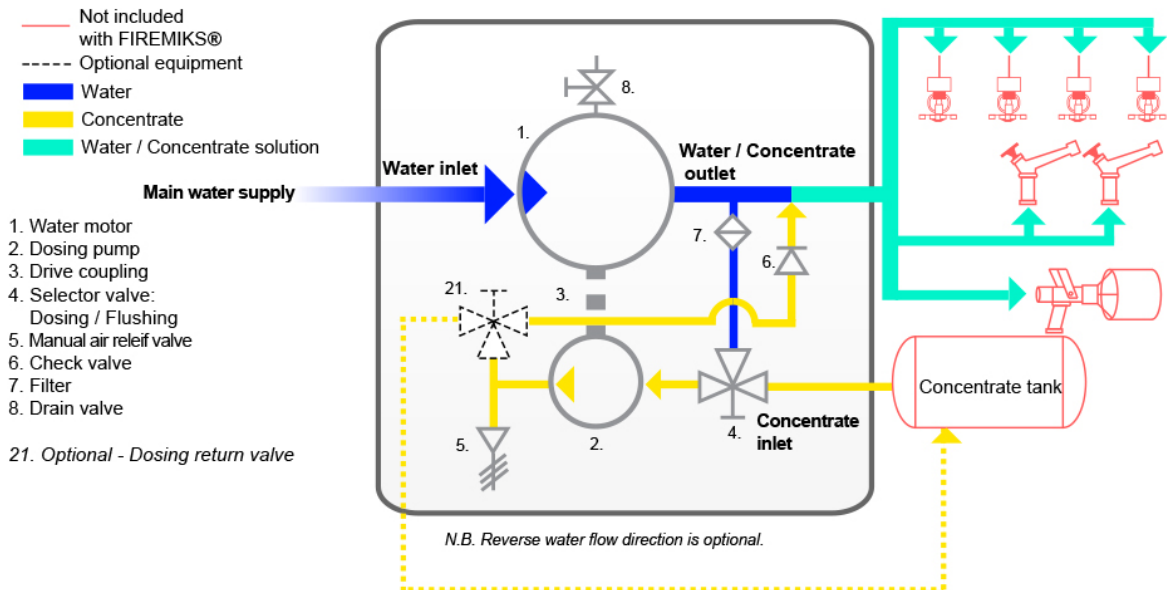

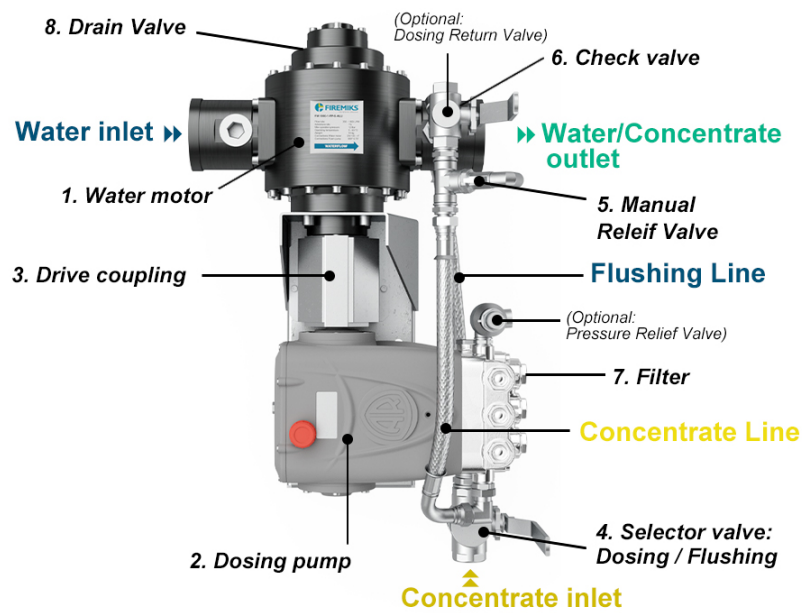

## OVERVIEW



*Note: For illustration only. Refer to Dimensional Drawing for accurate representation of each model.*

**FIREMIKS® is a registered trademark owned by Firemiks AB in Sweden.**



We reserve the right to make changes in the specifications without prior notice. Production is made according to European Directive 2006/42/EC  and conforms to applicable parts of NFPA 11 and NFPA 1901. 

Document: Data Sheet FIREMIKS FM Overall

Approved by: PA/MA

Version: 01

Date: 2018-01-09