


DATA SHEET | FIREMIKS® 2400-3-PP-F

PISTON PUMP TYPE FOR FIXED INSTALLATIONS

Approval: FM Class 5130, no 3060416



3% dosing system for firefighting - for fixed installations connected to a concentrate tank with gravity feed to dosing pump. Consists mainly of two volumetric parts; a Water motor and a Piston pump. Equipped with a Manual air relief valve. Flushing of dosing pump is done automatically when the concentrate inlet is closed with 3-way ball valve, (no 4 on Flow chart). Water motor available in three different materials, aluminium, nickel-aluminium bronze and stainless steel 316L.

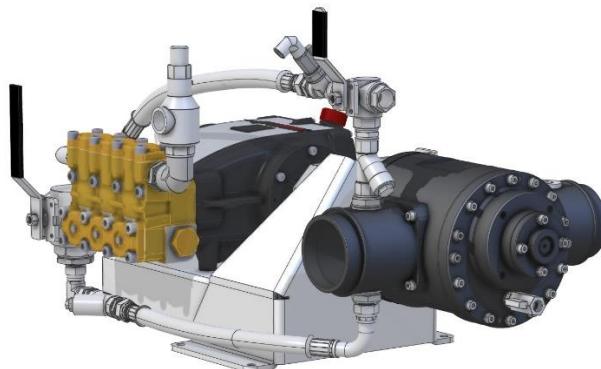

Note: For illustration only. Refer to Dimensional Drawing for accurate representation of each model.

TECHNICAL DATA

PRODUCT NO with water motor material:		
- Aluminium 6082/7075:	FIREMIKS 2400-3-PP-F-ALU-FM	
- Nickel-aluminium bronze JM7:	FIREMIKS 2400-3-PP-F-BRZ-FM	
- Stainless steel 316L:	FIREMIKS 2400-3-PP-F-SS-FM	
Nominal dosing rate:	3 % (approved range 3,0-3,9 %)	
Max water flow rate:	2400 lpm (634 US gpm)	
<i>Note! Maximum water flow rate is the approved maximum continuous flow rate entering the FIREMIKS. The unit has been tested for 40% overflow (=3360 lpm) for 3 minutes at start-up without damage. During overflow/overspeed, the correct dosing might not be achieved.</i>		
Min water flow rate:	311 lpm (83 US gpm), 309 lpm (82 US gpm)	
<i>Minimum water flow rate varies depending on system pressure and viscosity properties of the concentrate. Minimum flow rate is here defined as the lowest flow rate where the dosing is correct, above 3,0%, at 4 bar inlet pressure. The first number is valid for the lowest approved viscosity, the second for the highest, see below. At flows below minimum flow, some dosing will still happen as long as the unit turns. Once min flow is reached, correct dosing at higher flows is no longer sensitive to fluctuations in pressure or viscosity for a given system.</i>		
Approved viscosity range:	1 centipoise – 1800 centipoise at 60 rpm or 3600 centipoise at 30 rpm, with Brookfield viscometer spindle #4	
Max inlet operating pressure:	16 bar (232 psi)	
Factory tested pressure:	24 bar (348 psi)	
Suction height:	0 meters (0 ft) Gravity feed	
<i>The pump has suction capability, but it is not recommended to be relied upon for safe operation. Suction requires priming of the pump and will lower dosing performance.</i>		
Operation temperature:	1°C to 55 °C (34°F to 131°F)	
Storage temperature, dry condition:	-30°C to 55°C (-22° to 131°F)	
Connections water motor:	Standard: ANSI/AWWA C 606-04 Cut groove DN 100 (114,3)	Optional: G 4" male iso 228-1
<i>Other connections available by using adaptors.</i>		

Document: Data Sheet FIREMIKS 2400-3-PP-F-FM

Approved by: Walle


Version: 04

Date: 2019-11-20


MATERIALS	
Water motor housing and rotor:	Aluminium EN AW 6082/7075, hard-anodized and PTFE-coated
FIREMIKS 2400-3-PP-F-ALU-FM	Nickel-Aluminium Bronze JM7 (C95500)
FIREMIKS 2400-3-PP-F-BRZ-FM	Stainless Steel AISI 316L
Water motor components	AISI 316 (fasteners), PET (vanes), NBR (O-rings).
Dosing pump:	Aluminium, brass, ceramics, NBR, AISI 316 (fasteners)
Fittings:	High grade stainless steel
Valves and hoses:	High grade stainless steel + PTFE
DIMENSIONS AND DOSING PUMP CONNECTION	
Connection pump:	G 1 ½" female iso 228-1
Overall dim. L x W x H mm:	972 x 558 x 560
WEIGHT	
Weight *:	
FIREMIKS 2400-3-PP-F-ALU-FM:	120 kg
FIREMIKS 2400-3-PP-F-BRZ-FM:	179 kg
FIREMIKS 2400-3-PP-F-SS-FM:	176 kg
*Average value, depending on optional equipment	
PRESSURE LOSS TABLE (@8bar system pressure)	
311 lpm	0,5 bar
1.360 lpm	1,3 bar
2.400 lpm	2,6 bar
OPTIONAL	
Dosing return valve with pressure relief valve	Valve for returning the concentrate to the tank for easy and quick checking of admixture rate, without consuming concentrate and generating water/foam solution. Pressure relief valve included and set to open at 20 bar.
Reversed Flow direction (right to left)	Standard flow direction is from left to right seen from pump side
Adapters for water motor connections	Flanges of different kinds (ANSI, DIN), Storz couplings, etc
Y-strainer main water flow	If the firefighting water contains foreign particles a strainer in the main water line before the FIREMIKS is a necessity

While the above numbers are correct to our best knowledge, for best practice we strongly recommend contacting us with your dosing case, stating the required flows and pressures, the data sheet of the concentrates to be used and any other useful information, so we can provide you with our most suitable dosing solution.

FLOW CHART

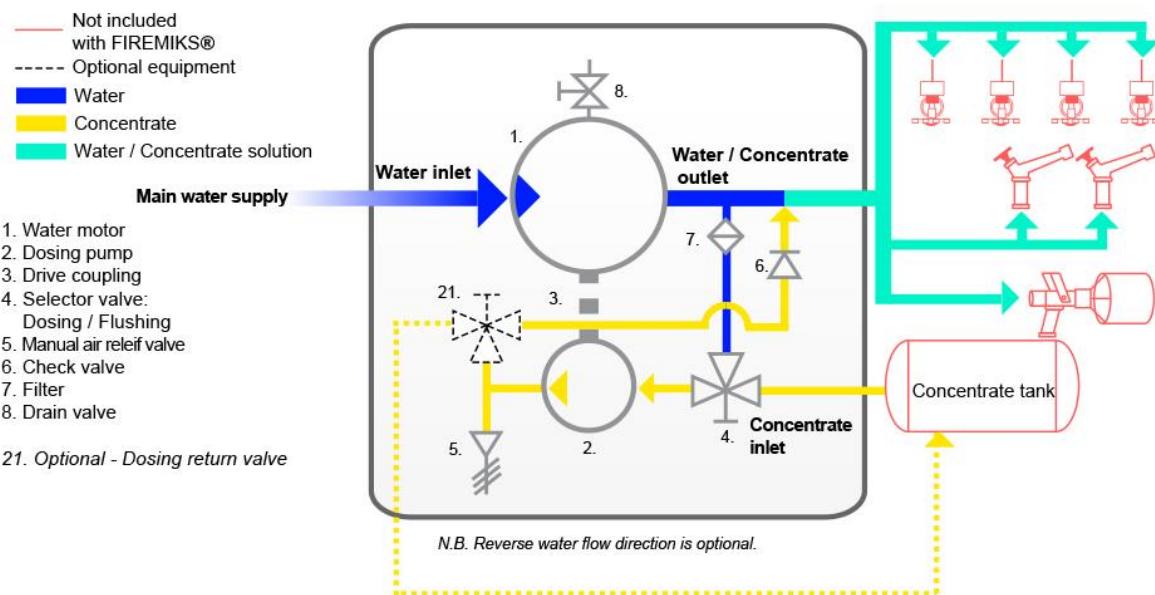

OVERVIEW

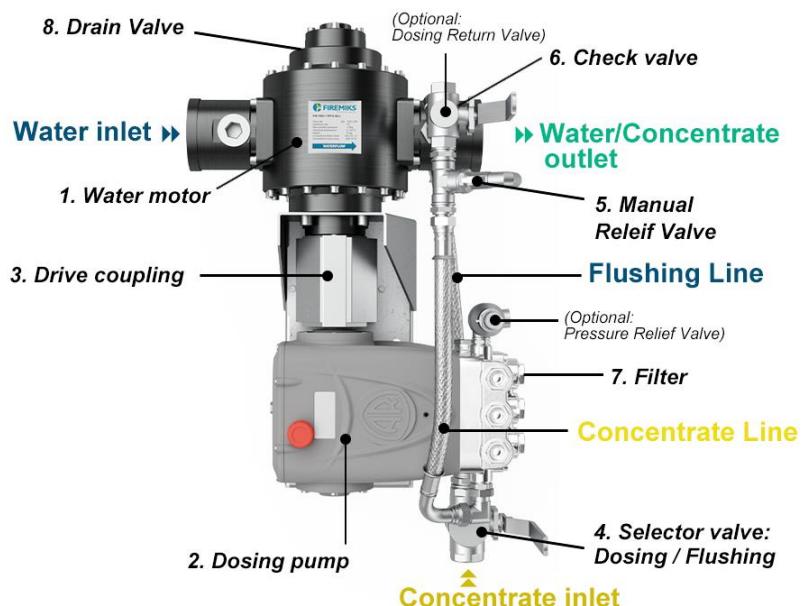

Note: For illustration only. Refer to Dimensional Drawing for accurate representation of each model.

FIREMIKS® is a registered trademark owned by Firemiks AB in Sweden.

For information on our FM-approval, go to www.approvalguide.com



We reserve the right to make changes in the specifications without prior notice. Production is made according to European Directive 2006/42/EC **CE** and conforms to applicable parts of NFPA 11 and NFPA 1901. 

Document: Data Sheet FIREMIKS 2400-3-PP-F-FM

Approved by: Walle

Version: 04

Date: 2019-11-20